


# DAC60000 SERIES

*110/125VDC Inverters with High Intelligence*



***Parallel connectable 1000VA ... 24 kVA  
Redundant n+1 system, hot swap modules  
Both On-line and Off-line applications  
6kVA and 30kVA static switch units***

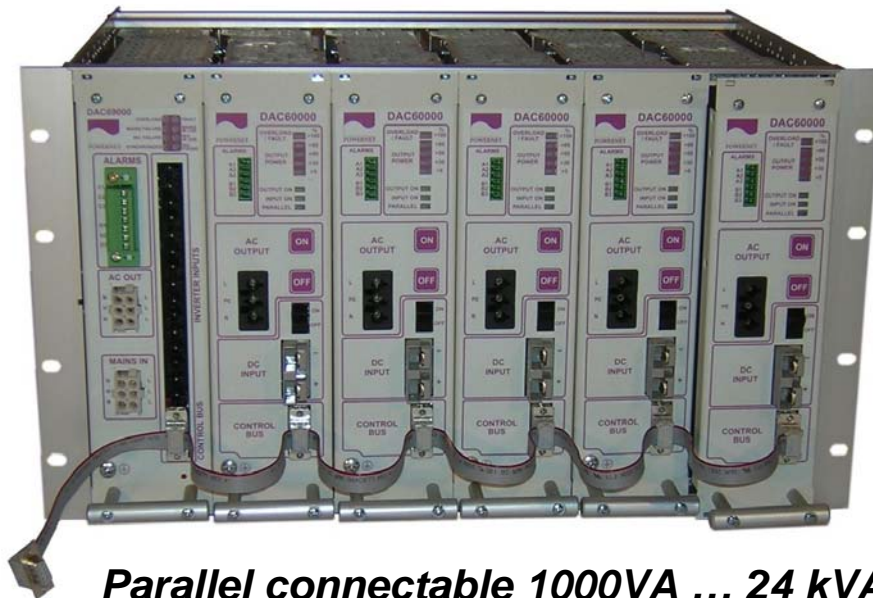

***Horizontal 2U installation by mechanical adapter***

- Real redundant, Fault tolerant system
- Small size, light weight, standard 19" rack
- High efficiency ( 90% )
- High overload capability
- User programmable features
- Remote monitoring through RS-232 with standard PC

PARALLEL CONNECTABLE INVERTERS						
Type	DC input Range	Nominal AC output	Nominal Power	Cooling	Dimensions Without handles	Weight
DAC62135VF	88...150VDC	230VAC, 50Hz	1000VA/700W	Convection	14TE x 6U x 372mm	4 kg
DAC62235VF	88...150VDC	230VAC, 50Hz	1200VA/1200W	Forced, fan	14TE x 6U x 372mm	4 kg
MSR7990+DAC62235VF	88...150VDC	230VAC, 50Hz	1200VA/1200W	Forced, fan	19" x 2U x 372mm	4,5 kg
ADU68230+DAC62235VF *)	88...150VDC	230VAC, 50Hz	1200VA/1200W	Forced, fan	19" x 2U x 372mm	4,5 kg

\*) Includes AC distribution 4 x MCB

STATIC SWITCH + MANUAL BYPASS	
Type	Description
BPU69130VF	External static switch, 6000VA 230VAC, 14TE x 6U x 372mm module
MSR7990+BPU69130VF	External static switch, 6000VA 230VAC, 19" x 2U x 372mm
BPU69430FR + MBP68400	External static switch and manual bypass, 30kVA 230VAC, 19" x 3U x 480mm
MBP68000 / MBP68200	See separate datasheets for 6U and 2U manual bypass solutions

ACCESSORIES	
Type	Description
MSR7990	19" 2U adapter for 6U 14TE inverter and static switch modules
WMA7830	Wall mounting adapter for 6U 14TE inverter, 1-3 modules can be mounted to one compact package
68200014	19" Subrack 6U 300mm for 1-6pcs of 14TE 6U models (note inverter's depth 372mm)
88680001	19" Subrack 7U 300mm for 1-6pcs of 14TE 6U models including parallel connection cables
8868000	Wall mountable 19" Subrack 7U 475mm for 1-6pcs of 14TE 6U models, shielded enclosure
8860000	Coverplate set for empty module place in 19" 6U subrack
8760037	Remote monitoring software in CD and RS232 cable between DAC60000 inverter and Computer
8760038	Communication system bus cable for 1...6 modules
876003H	Communication system bus cable for 1...12 modules
8781836	Communication adapter cable between inverter system bus D9 connector and 30kVA STS D15 connector
8760039	Power cable between 6kVA static switch and inverter

AC-DISTRIBUTION
See separate datasheets for AC-distribution solutions

**The Inverter packing includes following:**


- 1) Inverter
- 2) AC output connector (finger protected screw terminals)
- 3) DC input cable 3m 2.5mm<sup>2</sup>
- 4) User manual
- 5) Grounding cable 3m 2.5mm<sup>2</sup>

**The Static Switch packing includes:**

- 6) Static Switch
- 7) Mains Input cable 2m 4,5 mm<sup>2</sup>
- 8) AC output cable 2m 4,5 mm<sup>2</sup>
- 9) Grounding cable 2m 6mm<sup>2</sup>


**To be ordered separately**

- 10) RemoteMonitor software in CD and Remote monitoring cable PC-Inverter(s)
- 11) Parallel connecting cable for 2-6 modules
- 12) Power cable static switch – inverters 1m 1,5 mm<sup>2</sup>

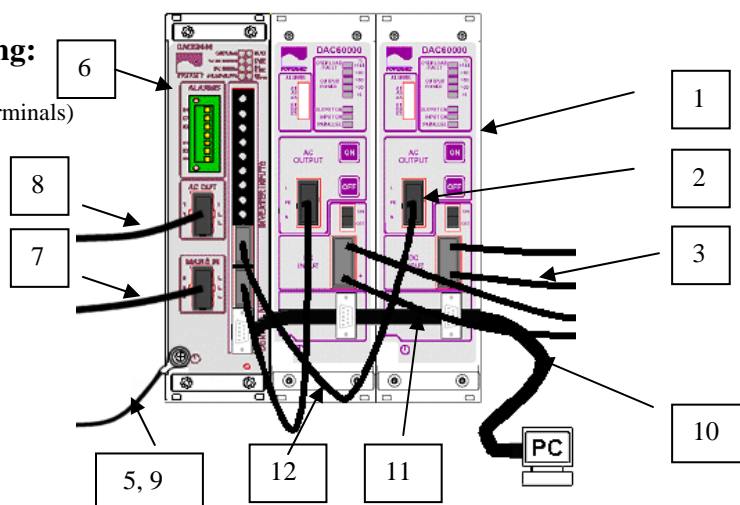


<b>SPECIFICATION INVERTERS</b>	<b>110VDC / 230VAC 1000VA</b>	<b>110VDC / 230VAC 1200VA</b>
<b>ELECTRICAL</b>		
Input voltage	88-150 VDC / TBD User programmable (PC/RS-232) start-up and shut down voltage limits and delays	88-150 VDC / TBD
Input current	10 Amax (continuous) 22 Amax (5 s)	16 Amax (continuous) 22 Amax (5 s)
Inrush current	< 10 A	< 10 A
Output voltage	Nominal 230 VAC sine wave, user programmable 200-240V, floating output	
Output frequency	Nominal 50 Hz, user programmable 40 - 70 Hz, crystal locked	
Nominal output power	1000VA / 700W	1200VA / 1200W
Output current	Nominal 4.4A Short circuit 13 A max 4 s	Nominal 5.2A Short circuit 13 A max 4 s
Efficiency	90 %	90 %
Load power factor range	Full power rating from 0 inductive to 0 capacitive	
Total harmonic distortion, resistive load	< 2 %	< 2 %
Crest factor	> 3	> 2.7
Static regulation, 0...100% load	+/-3%	+/-3%
Transient recovery	< 0.3 ms	< 0.3 ms
Psometric noise, input	< 2 mV	< 2 mV
Isolation	Input-Chassis 1500 VAC (2000 VCD) Input-Output 3000 VAC (4000 VDC) Output-Chassis 1500 VAC (2000 VDC)	
Overload	240 % (1700 W) / 5 seconds Max time can be limited shorter, 110% /60 s is always available Number of restart attempts and delays are user programmable	140 % (1700 W) / 5 seconds
Protection	Output current limiting Overload and short circuit proof Input and output fuses Additionally external fuse max C25A must be used in supply of each inverter module	
<b>STANDARDS</b>		
Safety	EN 60950-1	
EMC	Inverters: EN 55022A, EN61000-6-4, EN61000-6-2 Static Switch: As inverters except immunity: EN61000-4-3 radiated immunity according to EN61000-6-1, other immunity standards EN61000-6-2	
<b>ALARMS, INDICATIONS AND CONTROLS</b>		
LED-Indications	Input ON Output ON Output loading, 4 levels: >5%, >30%, >50%, >80% Overload / Fault	
Relay alarms	2 relay contacts: Fault in system summary alarm (module failure, DC input low etc) Primary supply failure (system with bypass) or Output ON indication (system without bypass) Relay contact rating: 60VDC/1A	
Remote monitoring through RS-232 (Remote monitoring software)	Status information: For example input and output voltage, power, temperature, faults etc. Parameter adjustment: For example input voltage limits, output voltage, over load, faults etc.	
<b>MECHANICAL</b>		
Dimensions	See first page	
Connectors in front panel	Input DC connector: Anderson SB506331 G4 Output: Finger protected AC-connector, Wieland ST18/3S2	
Enclosure	Steel casing IP20	
<b>ENVIRONMENTAL</b>		
Operating temperature	-10...45 C full power, 45...60 C reduced power, derating -2%/C typically	
Cooling	Natural convection	Forced cooling, monitored redundant fans
Altitude	Full power up to 2000m, derating -2% / 100m, max altitude 3000m	

## CONFIGURATIONS

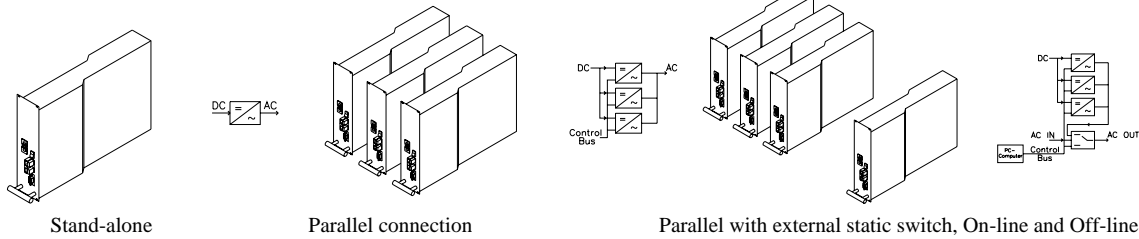

## EXPANDING SYSTEM

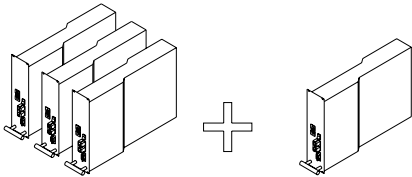

### More power needed or unit replacement


No need to shut down system output

1) Connect cables: DC cable, AC cable, System bus

2) Turn new unit on

- Automatically enters system
- Automatically adapts system parameters (voltage, frequency etc.)
- Automatically turns output on if the system output is on

## RS-232 AND SYSTEM BUS




Single 9 pin female D-connector

- Standard 4 pins for RS-232 for communication with a PC
- 2 pins for internal system communication

Single 9-pin flat cable

- male D-connectors for inverters
- one female connector for connecting PC or similar expansion cable

## REMOTE MONITORING SOFTWARE

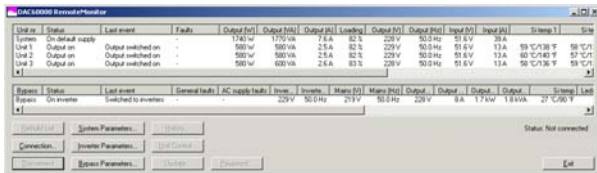

Continuous status information from all units:

- Output on/standby, voltage, current, power, loading per cent
- Input voltage and current
- Internal temperatures, led and button status, faults

Parameter adjustment (without turning system output off):

- Inverter start up and shut down input voltage limits, reaction delays
- Output voltage and frequency, restart attempts after overload shut down
- Bypass synchronising frequency range, accepted mains voltage range etc.

History file reading for last 30-40 events per module

Unit control to remote control or to read diagnostics

Software updates to update or add features for DAC60000 inverters

## RELIABILITY

Real redundancy - No single failure may fail the system

No external controller

- No other master slave dependence but synchronising
- If synchronising master fails, next unit starts sending the synchronising data

Rugged system bus structure with galvanic isolation

Automatic bus address configuring

- No need for address setup by user
- No malfunctions because of wrong setup

Self tests and diagnostics

- Full automatic power stage test every time inverter is started
- Continuous monitoring of internal operations
- Error counters (RS-232) for troubleshooting
- Recognising of wrong connections (cable not connected, wrong AC bus polarity)

Recovery and monitoring procedures in hardware and software

- Stands disturbances in system bus
- Stands accidental system bus disconnecting for seconds
- Stands wrong connections of cables
- If one unit fails other units alarm
- Voting procedures for recognising and filtering wrong operation

Automatic fast shut down of failed unit

- Disconnecting from AC bus in 10 ms
- Automatic watch dog restart if processor hangs up
- Unit automatically turns output off if synchronising lost for too long time

Internal history file in each inverter, last 30-40 system and unit specific events

## COMPLETE INVERTER SYSTEMS, AC-DISTRIBUTION AND MANUAL BYPASS



### 19" sub-rack systems

1-20 inverters up to 24kVA  
Static Switch, manual bypass  
AC- and DC-distribution  
1-pole MCBs, 2-pole MCBs,  
Schuko outlets, RCD



### 19" 1U IEC320 distribution

AC-distribution, load monitoring  
and parallel connection units

Please contact Powernet for customized  
inverter system configurations